


Ordering code	
17208C.E.T	
CONNECTIONS	
C	A = G 1/4"
	B = G 3/8"
FILTER EFFICIENCY	
E	E = 99,97%
TYPE	
T	S = Automatic drain

Example: 17208A.E
Coalescing filter size 2 with G 1/4" connections and filter efficiency of 99,97%.

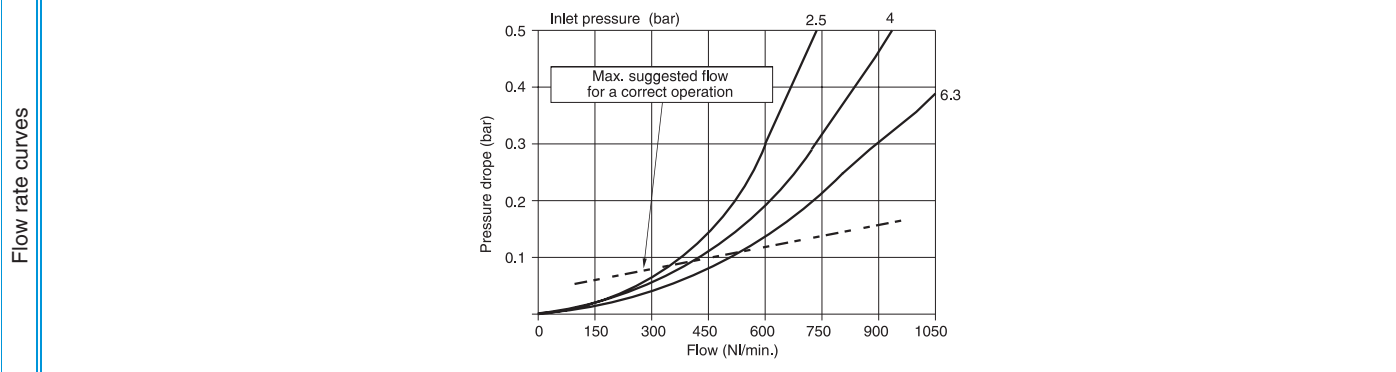

Construction and working characteristics	Technical characteristics	
<ul style="list-style-type: none"> - Coalescing filter element remove 0,1 particles equivalent to 99,97%. - Body made with light alloy. - Wall mounting possibility with M5 screw protected by covers. - Transparent technopolymer bowl with shock resistant technopolymer protection connected to the body with bayonet cap and safety button. - Manual and semi-automatic water drain valve; in the semi-automatic version the drainage happens when there is no pressure or by pushing the valve up-wards. - Possibility to see the water level on 360° also with Bowl protection assembled. - Automatic water drainage bowl available on request. 	Connections	G 1/4" - G 3/8"
	Max. Inlet pressure	13 bar - 1,3 MPa
	Max. ambient temperature (at 10 bar)	50°C
	Weight	gr. 255
	Filter efficiency with 0,1 particle	99,97%
	Bowl capacity	28 cm ³
	Assembly position	Vertical
	Wall fixing screw	M5
	Max. fitting torque	25 Nm