


Ordering code

17308C.E.T

C	CONNECTIONS
A	A = G 3/8"
B	B = G 1/2"
E	FILTER EFFICIENCY
E	E = 99,97%
T	TYPE
S	S = Automatic drain

Example: 17308A.E
Coalescing filter size 3 with G 3/8" connections and filter efficiency of 99,97%.

Flow rate curves

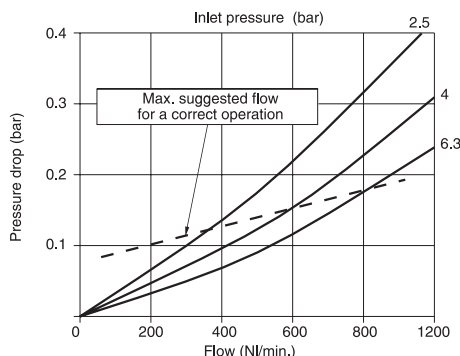

Construction and working characteristics

- Coalescing filter element remove 0,1 particles equivalent to 99,97%.
- Body made with light alloy.
- Wall mounting possibility with M6 screws protected by covers.
- Transparent technopolymer bowl with shock resistant technopolymer protection connected to the body with bayonet cap and safety button.
- Manual and semi-automatic water drain valve; in the semi-automatic version the drainage happens when there is no pressure or by pushing the valve up-wards.
- Possibility to see the water level on 360° also with bowl protection assembled.
- Automatic water drainage bowl available on request.

Technical characteristics

Connections	G 3/8" - G 1/2"
Max. Inlet pressure	13 bar - 1,3 MPa
Max. ambient temperature (at 10 bar)	50°C
Weight	gr. 405
Filter efficiency with 0,1 particle	0,9997
Bowl capacity	17 cm ³
Assembly position	Vertical
Wall fixing screw	M6
Max. fitting torque	40 Nm

