

sales@hydraulics2u.co.uk

RSM, RCS-Series, Low Height Cylinders



▼ Shown from left to right: RSM-1000, RSM-300, RSM-50, RCS-1002, RCS-302



- · Compact, flat design for use where most other cylinders will not fit
- Single-acting, spring return

RSM-series, Flat-Jac® Cylinders

- RSM-750, 1000 and 1500 have handles for easy carrying
- Mounting holes permit easy fixturing
- · Baked enamel finish for increased corrosion resistance
- CR-400 coupler and dust cap included on all models¹⁾
- Hard chrome plated high quality steel plungers
- · Grooved plunger ends require no saddle.

RCS-series, Low Height Cylinders

- · Lightweight, low profile design for use in confined spaces
- · Single-acting, spring return
- · Baked enamel finish for increased corrosion resistance
- · Plunger wiper reduces contamination, extending cylinder life
- CR-400 coupler and dust cap included on all models
- Grooved plunger end with threaded holes for mounting tilt saddles
- Integral handle on RCS-1002 for easy carrying
- Plated steel plungers.

Maximum Powerto-Height Ratio




Saddles

All RCS-Series cylinders have plunger mounting holes for installation of tilt saddles. See table for selection and dimensional information.

Page:

Low Clearance Lifting The LW-16 Lifting Wedge and SOH-Series Machine Lifts are the perfect choice for lifting the first few millimeters.

Only a couple of centimeters will do for an RSM-cylinder to lift a large construction.



| Cyl. Capa- city | Stroke | Model Number | Cyl. Effect. Area | Oil Cap. | |
|-----------------------|--------|----------------------|-------------------------|-------------|--|
| ton (kN) | (mm) | | (cm²) | (cm³) | |
| 5 (45) | 6 | RSM-50 ¹⁾ | 6,5 | 4 | |
| 10 (101) | 12 | RSM-100 | 14,5 | 18 | |
| 20 (201) | 11 | RSM-200 | 28,7 | 32 | |
| 30 (295) | 13 | RSM-300 | 42,1 | 55 | |
| 45 (435) | 16 | RSM-500 | 62,1 | 99 | |
| 75 (718) | 16 | RSM-750 | 102,6 | 164 | |
| 90 (887) | 16 | RSM-1000 | 126,7 | 203 | |
| 150 (1386) | 16 | RSM-1500 | 198,1 | 317 | |
| 10 (101) | 38 | RCS-101* | 14,5 | 55 | |
| 20 (201) | 45 | RCS-201* | 28,7 | 129 | |
| 30 (295) | 62 | RCS-302* | 42,1 | 261 | |
| 45 (435) | 60 | RCS-502* | 62,1 | 373 | |
| 90 (887) | 57 | RCS-1002* | 126,7 | 722 | |

1) RSM-50 is fitted with an AR-400 coupler. Available as set, see note on next page.




We offer a Full Range of Hydraulic Products from a comprehensive range of manufacturers to bring you the products and systems most suited to your applications



sales@hydraulics2u.co.uk

Single-Acting, Low Height Cylinders

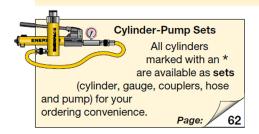

| Optional Bolt On Tilt Saddle Dimensions (mm) | | | | | | | | | |
|--|-----------------|----|----|----|---------|--|--|--|--|
| For Cylinder Model: | Model Number | A | В | C* | C 10-5° | | | | |
| RCS-101 | CAT-11 | 35 | 11 | 21 | B | | | | |
| RCS-201, -302, -502 | CAT-51 | 50 | 15 | 29 | A A | | | | |
| RCS-1002 | CAT-101 | 71 | 17 | 35 | | | | | |

 * 'C' dimension equals saddle protrusion from plunger. Mounting screws are included.






Capacity: 5 - 150 ton

Stroke:

6 - 62 mm

Maximum Operating Pressure:

700 bar

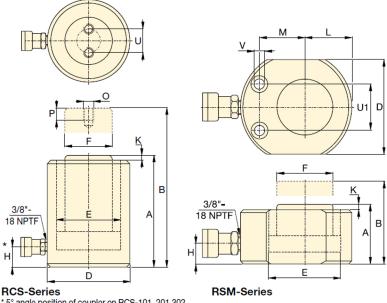

| RSM Cylinder Mounting Hole Dimensions (mm) | | | | | | | | | |
|--|----------------------|-------------------|-------------------------|--------------------------|--|--|--|--|--|
| Model Number | Bolt Circle U1 | Hole Dia. V | Counter Bore Dia. | Counter Bore Depth | | | | | |
| RSM-50 | 28,5 | 5,5 | 9,1 | 4,3 | | | | | |
| RSM-100 | 36,6 | 7,1 | 10,7 | 7,9 | | | | | |
| RSM-200 | 49,3 | 10,0 | 15,1 | 9,9 | | | | | |
| RSM-300 | 52,3 | 10,0 | 15,9 | 11,2 | | | | | |
| RSM-500 | 66,5 | 11,0 | 19,0 | 12,7 | | | | | |
| RSM-750 | 76,2 | 13,5 | 20,6 | 14,2 | | | | | |
| RSM-1000 | 76,2 | 13,5 | 20,6 | 14,2 | | | | | |
| RSM-1500 | 117,3 | 13,5 | 20,6 | 14,2 | | | | | |

| 1100 | J-001103 | | | |
|--------|---------------|---------------|----------|---------|
| * 5° a | ngle position | of coupler on | RCS-101, | 201,302 |

| Collapsed Height | Extended Height | Outside Diameter | Cylinder Bore Dia. | Plunger Dia. | Base to Advance Port | Plunger Protrusion from Base | Plunger to Base | Plunger to Mtg. Hole | Thread | Thread Depth | Bolt Circle | À | Model Number |
|---------------------|--------------------|---------------------|--------------------------|-----------------|----------------------------|------------------------------------|-----------------------|----------------------------|-----------|-----------------|----------------|------|----------------------|
| A (mm) | B (mm) | D (mm) | E (mm) | F (mm) | H (mm) | K (mm) | L (mm) | M (mm) | O (mm) | P (mm) | U (mm) | (kg) | |
| 32 | 38 | 58 x 41 | 28,7 | 25,4 | 16 | 1 | 20 | 22 | - | - | - | 1,0 | RSM-50 ¹⁾ |
| 43 | 54 | 82 x 55 | 42,9 | 38,1 | 19 | 1 | 27 | 34 | - | _ | - | 1,4 | RSM-100 |
| 51 | 62 | 101 x 76 | 60,5 | 50,8 | 19 | 1 | 39 | 39 | _ | _ | - | 3,1 | RSM-200 |
| 58 | 71 | 117 x 95 | 73,2 | 63,4 | 19 | 2 | 47 | 44 | _ | _ | _ | 4,5 | RSM-300 |
| 66 | 82 | 140 x 114 | 88,9 | 69,8 | 19 | 2 | 57 | 53 | - | _ | - | 6,8 | RSM-500 |
| 79 | 95 | 165 x 139 | 114,3 | 82,6 | 19 | 2 | 69 | 66 | - | - | - | 11,3 | RSM-750 |
| 85 | 101 | 178 x 153 | 127,0 | 92,2 | 19 | 2 | 76 | 74 | _ | _ | - | 14,5 | RSM-1000 |
| 100 | 116 | 215 x 190 | 158,8 | 114,3 | 23 | 2 | 95 | 82 | - | - | - | 26,3 | RSM-1500 |
| 88 | 126 | 69 | 42,9 | 38,1 | 17 | 5 | _ | _ | M4 | 8 | 26 | 4,1 | RCS-101* |
| 98 | 143 | 92 | 60,5 | 50,8 | 17 | 3 | - | - | M5 | 8 | 40 | 5,0 | RCS-201* |
| 117 | 179 | 101 | 73,2 | 66,5 | 19 | 3 | _ | _ | M5 | 8 | 40 | 6,8 | RCS-302* |
| 122 | 182 | 124 | 88,9 | 69,8 | 23 | 2 | - | - | M5 | 8 | 40 | 10,9 | RCS-502* |
| 141 | 198 | 165 | 127,0 | 92,2 | 31 | 1 | _ | _ | M8 | 10 | 55 | 22,7 | RCS-1002* |

We offer a Full Range of Hydraulic Products from a comprehensive range of manufacturers to bring you the products and systems most suited to your applications

