


CETOP 3: Manifold Block

Features:

- Cast Iron Construction – Phosphated
- 345 Bar Maximum Working Pressure
- 40 L/min Maximum Flow Rate
- P and T Ports – 1/2" BSP
- A and B Ports – 3/8" BSP

Benefits:

- Reduced Fitting and Installation Costs
- Compact design of valve circuits
- Reduces leak Paths
- Allows for easy modification to valve assembly stacks

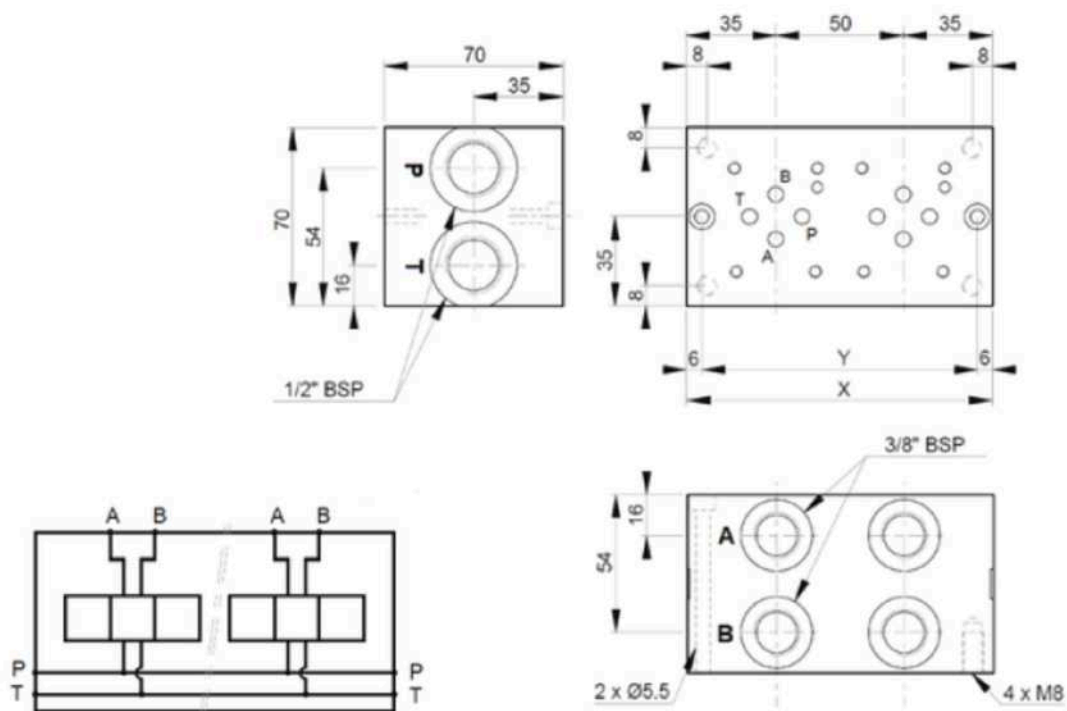

| Part Number | No. Of Stations | X (mm) | Y (mm) |
|-------------|-----------------|--------|--------|
| SM3-1G | 1 | 70 | 58 |
| SM3-2G | 2 | 120 | 108 |
| SM3-3G | 3 | 170 | 158 |
| SM3-4G | 4 | 220 | 205 |
| SM3-5G | 5 | 270 | 258 |
| SM3-6G | 6 | 320 | 308 |

We offer a Full Range of Hydraulic Products from a comprehensive range of manufacturers to bring you the products and systems most suited to your applications

