

XC-Series, Cordless Hydraulic Pumps



▼ Shown: XC-1201ME



- Lightweight design with integrated handle and carrying strap for portability
- Bladder reservoir prevents contamination and allows pump usage in any position
- Powerful 0,37 kW motor and 28 Volt Lithium-Ion battery deliver exceptional speed and run time
- High-strength fiberglass reinforced composite shroud for superior durability in demanding job site environments
- Cordless technology eliminates tripping hazards found in other powered pumps.



Performance of a Powered Pump Portability of a Hand Pump



G2535L Gauge
Use gauge to check system pressure. Use gauge adaptor **GA-3** for easy mounting.

Page: 124



Battery packs contain no cadmium, so they are environmentally friendly. Enerpac encourages recycling.



28-Volt Battery
The XC-28V with Lithium-Ion technology for maximum battery performance.



Battery Charger
1-hour quick charger.

Model Nr.	Voltage
XC-115VC	115 VAC
XC-230VC	230 VAC



3/8" Swivel Connector
360 degree swivel coupler for optimal orientation of the hydraulic connection on cylinders, pumps and hoses. Order Model Nr. **XSC-1**.

Page: 121

◀ Power and simplicity for the toughest jobs.

We offer a Full Range of Hydraulic Products from a comprehensive range of manufacturers to bring you the products and systems most suited to your applications



Cordless Hydraulic Pumps



XC-Series Cordless Hydraulic Pumps

The XC-Series cordless pump is ideal for jobs using small to medium size cylinders and hydraulic tools, and is compatible with over 140 Enerpac tools and cylinders.

These cordless pumps combine the performance of a powered pump with the portability of a hand pump making them a perfect solution for remote applications with limited or no access to a power supply or for locations where corded solutions present trip hazards.

The Lithium-Ion battery provides superior run time:

- 250 cuts of 10 mm reinforcing bar using a WHC-750 cutter
- >100 lifts with a WR-5 spreader up to maximum load
- 45 splits on M27 - 8.8 nuts using a NC-3241 nut cutter
- 30 times lifting with a RC-104 cylinder (10 ton, 100 mm stroke).

Note: Actual number of cycles per charge will vary depending on condition of battery, tool and ambient conditions.

The XC-Series cordless pump is CSA and CE compliant.



XC Series




Reservoir Capacity:
1,0 - 2,0 litres




Flow at Rated Pressure:
0,25 l/min

Maximum Operating Pressure:
700 bar

OIL FLOW vs. PRESSURE

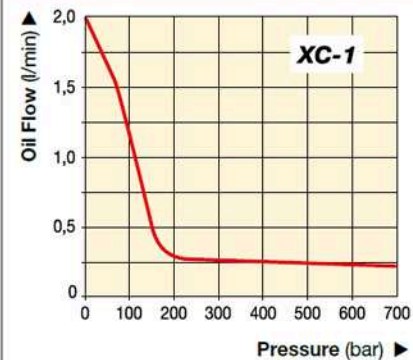

- ① Outlet "Advance" Port 3/8"-18 NPTF
- ② Oil Fill (must use funnel)
- ③ User Adjustable Relief Valve Access Port
- ④ Directional Control Valve
- ⑤ Shoulder Strap Connection Points
- ⑥ Safety Lock Feature
- ⑦ On/Off Switch

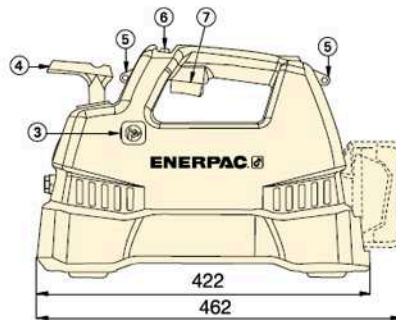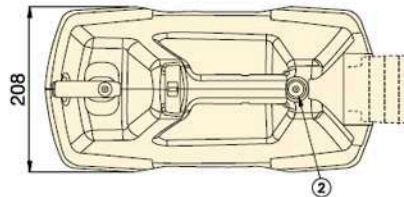

▼ Take the battery pump anywhere without power cords or air hoses.



SELECTION CHART

Useable Oil Capacity (litres)	Model Number	Output Flow Rate (l/min)			Valve Function **	Charger Voltage (VAC)	Weight (kg)
		No Load	140 bar	700 bar			
1,0	XC-1201MB	2,0	0,50	0,25	3-way, 2-pos.	115	10
2,0	XC-1202MB	2,0	0,50	0,25	3-way, 2-pos.	115	11
1,0	XC-1201ME	2,0	0,50	0,25	3-way, 2-pos.	230	10
2,0	XC-1202ME	2,0	0,50	0,25	3-way, 2-pos.	230	11
1,0	XC-1201M *	2,0	0,50	0,25	3-way, 2-pos.	-	10
2,0	XC-1202M *	2,0	0,50	0,25	3-way, 2-pos.	-	11

* Batteries and charger not included.

** For use with single-acting cylinders or tools.

We offer a Full Range of Hydraulic Products from a comprehensive range of manufacturers to bring you the products and systems most suited to your applications

