


Ordering code

**17V08C.E.T**

<b>V</b>	VERSION
0	Zinc alloy body
1	Technopolymer body
<b>CONNECTIONS</b>	
<b>C</b>	A = G 1/8"
	B = G 1/4"
<b>FILTER EFFICIENCY</b>	
<b>E</b>	E = 99,97%
<b>TYPE</b>	
<b>P</b>	P = Bowl protection
<b>T</b>	S = Automatic drain
	PS = Bowl protection and Automatic drain

Example: 17108A.E.P  
Filter size 1 with G 1/8" connections. Filter efficiency 99,97% and bowl protection with technopolymer body.

Flow rate curves

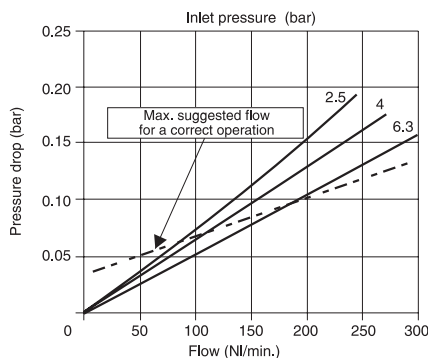

3

**Construction and working characteristics**

- Coalescing filter element remove 0,1 particle equivalent to 99,97%.
- Zinc alloy body or reinforced technopolymer body with threaded brass insert connections.
- Wall mounting possibility with M4 screws protected by covers.
- Transparent technopolymer bowl screwed to the body.
- Shock resistant bowl technopolymer protection.
- Manual and semi-automatic water drain valve; in the semi-automatic version the drainage happens when there is no pressure or by pushing the valve up-wards.
- Possibility to see the water level on 360° also with bowl protection assembled.
- Automatic water drainage bowl available on request.

**Technical characteristics**

Connections	G 1/8" - G 1/4"
Max. Inlet pressure	13 bar - 1,3 MPa
Max. ambient temperature (at 10 bar)	50°C
Weight with technopolymer body	gr. 110
Weight with zinc alloy body	gr. 225
Filter efficiency with 0,1 particle	0,9997
Bowl capacity	17 cm <sup>3</sup>
Assembly position	Vertical
Wall fixing screw	M4
Max. fitting torque on zinc alloy body	30 Nm
Max. fitting torque on technopolymer body	15 Nm