
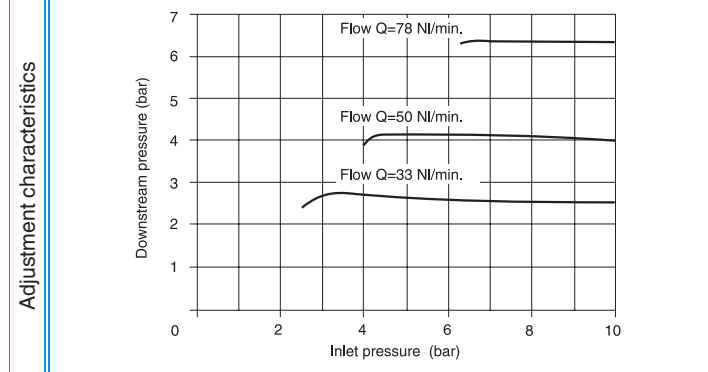


Ordering code	
17206C.S.G.T	
CONNECTIONS	
C	A = G 1/4"
	B = G 3/8"
Filter pore size	
S	A = 5
	B = 20
	C = 50
ADJUSTING RANGE	
G	A = 0 - 2 bar
	B = 0 - 4 bar
	C = 0 - 8 bar
	D = 0 - 12 bar
TYPE	
T	S = Automatic drain

Example: 17206A.B.C.S
 Service unit combination complete with filter - pressure regulator and lubricator size 2, G 1/4" connections, filter pore size 20 , adjusting range 0-8 bar and automatic drain.

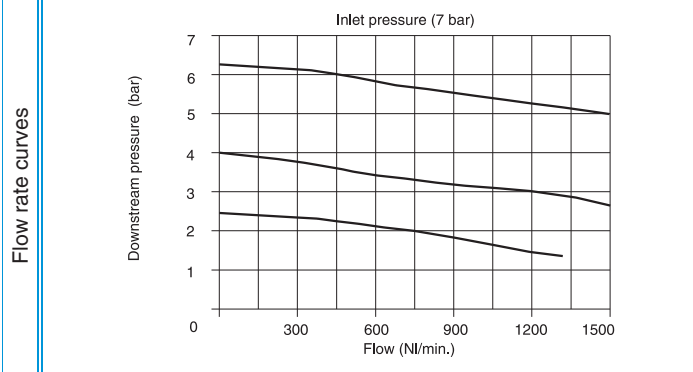

- Construction and working characteristics**
- Filter - diaphragm pressure regulator with relieving.
 - Balanced poppet.
 - Double filtering action: by air centrifuging and by replaceable and reusable HDPE porous filter element.
 - Body made with light alloy.
 - Wall mounting possibility with M5 screws protected by covers.
 - Lockable handle by simply pressing it downwards in the desired position.
 - Transparent technopolymer bowl with shock resistant technopolymer protection connected to the body with bayonet cap and safety button.
 - Manual and semi-automatic water drain valve; in the semi-automatic version the drainage happens when there is no pressure or by pushing the valve up-wards.
 - Possibility to see the water level on 360° also with bowl protection assembled.
 - Automatic water drainage bowl available on request.
 - Two pressure gauge connections with plug complete of seal.
 - Fog type lubrication with variable section orifice according to the flow.
 - Transparent technopolymer sight dome with adjusting handle.
 - Oil filling plug.

Techical characteristics

Connections	G 1/4" - G 3/8"
Max. Inlet pressure	13 bar - 1,3 MPa
Max. ambient temperature (at 10 bar)	50°C
Pressure gauge connections	G 1/8"
Weight	gr. 750
Pressure range	0 - 2 bar / 0 - 4 bar 0 - 8 bar / 0 - 12 bar
Filter pore size	5 - 20 - 50
Bowl capacity	28 cm ³
Indicative oil drip rate	1 drop every 300/600 NI
Oil type	FD22 - HG32
Bowl capacity	50 cm ³
Min. operational flow	20 NI/min
Assembly position	Vertical
Wall fixing screw	M5
Max. fitting torque	25 Nm