


Ordering code

17V01C.S.T

V	VERSION
0	Zinc alloy body
1	Technopolymer body
C CONNECTIONS	
A	G 1/8"
B	G 1/4"
Filter pore size	
S	A = 5
	B = 20
	C = 50
TYPE	
P	Bowl protection
T	S = Automatic drain
	PS = Bowl protection and Automatic drain

Example: 17101A.B.P
Filter size 1 with G 1/8" connections, filter pore size 20 and bowl protection with technopolymer body.

3
Flow rate curves

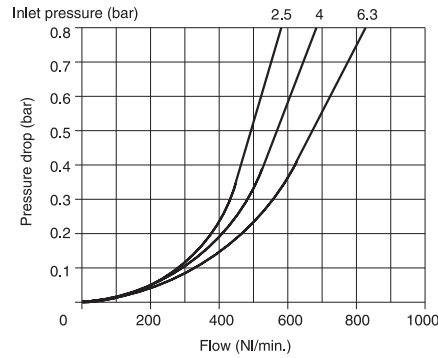

Construction and working characteristics

- Double filtering action: by air centrifuging and by replaceable and reusable HDPE porous filter element.
- Zinc alloy body or reinforced technopolymer body with threaded brass insert connections.
- Wall mounting possibility with M4 screws protected by covers.
- Transparent technopolymer bowl screwed to the body.
- Shock resistant bowl technopolymer protection.
- Manual and semi-automatic water drain valve; in the semi-automatic version the drainage happens when there is no pressure or by pushing the valve up-wards.
- Possibility to see the water level on 360° also with bowl protection assembled.
- Automatic water drainage bowl available on request.

Technical characteristics

Connections	G 1/8" - G 1/4"
Max. Inlet pressure	13 bar - 1,3 MPa
Max. ambient temperature (at 10 bar)	50°C
Weight with technopolymer body	gr. 103
Weight with zinc alloy body	gr. 218
Filter pore size	5 - 20 - 50
Bowl capacity	17 cm ³
Assembly position	Vertical
Wall fixing screw	M4
Max. fitting torque on zinc alloy body	30 Nm
Max. fitting torque on technopolymer body	15 Nm