


sales@hydraulics2u.co.uk

## **TMDC Double Acting Hydraulic Cylinders**

Double Acting Cylinder or Single Acting with Breather

Max Working Pressure - 250 BAR
Max Speed - 0.5 M/Sec
Operating Temp - +80 to -25
Tube - Steel ST52.3 - DIN2393 ISO H9
Chrome Rod - Steel UNI C45
25 Micron - EN8 Grade

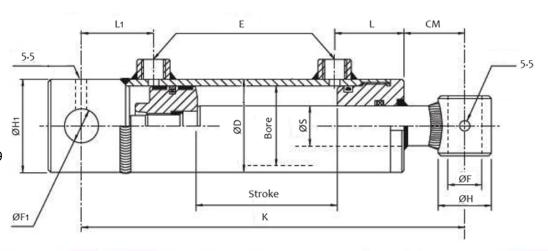

				Closed Centres								
	BORE	D	s	K	STROKE	Е	CM	L	L1	н	Н1	F/F1
PART NUMBER	Ø (mm)	Ø (mm)	Ø (mm)	(mm)	(mm)	(BSP)	(mm)	(mm)	(mm)	Ø (mm)	Ø (mm)	Ø (mm)
TMDC-25-16-050				160	50							
TMDC-25-16-100	25	35	16	210	100	1/4BSP	31	23	22	25	35	12.1
TMDC-25-16-150				260	150							
TMDC-25-16-200				310	200							
TMDC-32-20-050				205	50							
TMDC-32-20-100				255	100							
TMDC-32-20-150				305	150							
TMDC-32-20-200				355	200							
TMDC-32-20-250	32	42	20	405	250	1/4BSP	51	33	35	30	40	16.2
TMDC-32-20-300				455	300							
TMDC-32-20-400				555	400							
TMDC-32-20-500				655	500							
TMDC-40-25-100				270	100							
TMDC-40-25-150				320	150							
TMDC-40-25-200				370	200							
TMDC-40-25-250				420	250							
TMDC-40-25-300				470	300							
TMDC-40-25-400	40	50	25	570	400	3/8BSP	65	40	38	35	50	20.25
TMDC-40-25-500				670	500							
TMDC-40-25-600				770	600							
TMDC-40-25-700				870	700							
TMDC-40-25-800				970	800							
TMDC-50-30-100				300	100							
TMDC-50-30-150				350	150							
TMDC-50-30-200				400	200							
TMDC-50-30-250				450	250							
TMDC-50-30-300				500	300							
TMDC-50-30-400	50	60	30	600	400	3/8BSP	85	43	42	40	60	25.5
TMDC-50-30-500				700	500							
TMDC-50-30-600				800	600							
TMDC-50-30-700				900	700							
TMDC-50-30-800				1000	800							
TMDC-50-30-900				1100	900							
TMDC-50-30-1000				1200	1000							
TMDC-60-30-100				300	100							
TMDC-60-30-150				350	150							
TMDC-60-30-200				400	200							
TMDC-60-30-250				450	250							
TMDC-60-30-300				500	300							
TMDC-60-30-350	60	70	30	550	350	3/8BSP	83	50	36	40	70	25.5
TMDC-60-30-400				600	400							
TMDC-60-30-450				650	450							
TMDC-60-30-500				700	500							
TMDC-60-30-600				800	600							
TMDC-60-30-700				900	700							
TMDC-60-35-200				400	200							
TMDC-60-35-300				500	300							
TMDC-60-35-400				600	400							
TMDC-60-35-500				700	500							
TMDC-60-35-600	60	70	35	800	600	3/8BSP	83	50	36	40	70	25.5
TMDC-60-35-700				900	700							
TMDC-60-35-800				1000	800							
TMDC-60-35-900				1100	900							
TMDC-60-35-1000				1200	1000							

We offer a Full Range of Hydraulic Products from a comprehensive range of manufacturers to bring you the products and systems most suited to your applications






sales@hydraulics2u.co.uk

## **TMDC Double Acting Hydraulic Cylinders**

Double Acting Cylinder or Single Acting with Breather

Max Working Pressure - 250 BAR
Max Speed - 0.5 M/Sec
Operating Temp - +80 to -25
Tube - Steel ST52.3 - DIN2393 ISO H9
Chrome Rod - Steel UNI C45
25 Micron - EN8 Grade

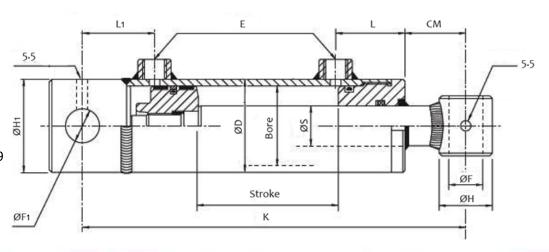

				Closed Centres								
	BORE	D	S	K	STROKE	E	CM	L	L1	Н	H1	F/F1
PART NUMBER	Ø (mm)	Ø (mm)	Ø (mm)	(mm)	(mm)	(BSP)	(mm)	(mm)	(mm)	Ø (mm)	Ø (mm)	Ø (mm)
TMDC-70-40-200				410	200							
TMDC-70-40-250				460	250							
TMDC-70-40-300				510	300							
TMDC-70-40-350				560	350							
TMDC-70-40-400				610	400							
TMDC-70-40-450	70	80	40	660	450	3/8BSP	82	50	46	50	80	30.25
TMDC-70-40-500				710	500							
TMDC-70-40-600				810	600							
TMDC-70-40-700				910	700							
TMDC-70-40-800				1010	800							
TMDC-70-40-900				1110	900							
TMDC-80-40-200				410	200							
TMDC-80-40-250				460	250							
TMDC-80-40-300				510	300							
TMDC-80-40-350				560	350							
TMDC-80-40-400				610	400							
TMDC-80-40-500	80	92	40	710	500	3/8bsp	70	60	42	50	90	30.25
TMDC-80-40-600				810	600							
TMDC-80-40-700				910	700							
TMDC-80-40-800				1010	800							
TMDC-80-40-900				1110	900							
TMDC-80-40-1000				1210	1000							
TMDC-100-50-200				425	200							
TMDC-100-50-300				525	300							
TMDC-100-50-400				625	400							
TMDC-100-50-500	100	115	50	725	500	1/2BSP	75	66	45	60	115	30.25
TMDC-100-50-700				925	700							
TMDC-100-50-900				1125	800							
TMDC-100-50-1000				1225	1000							

