



## SPECIFICATIONS

Maximum handle load : 196 N  
 Two stage pumping  
 Relief valve is not equipped  
 Reservoir capacity : 120 cc

Output force : 59 kN

## SIZE

570 (L) mm


## WEIGHT

5.7 kg

## ACCESSORIES

Carrying bag

S-40B

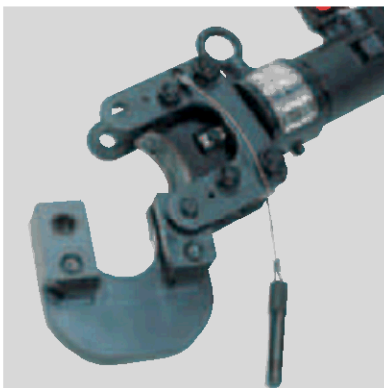

S-40B (Head opened)

## FEATURES

Light weight portable hydraulic cutter features :

- \* Guillotine type cutting for less jamming than shear type cutting
- \* No set-up time required
- \* All blades are easily replaceable
- \* 180 degree rotating head allows for easy cutting positions
- \* Two stage pumping for rapid blade advance
- \* Lock pin type cutter head
- \* Suitable for transmission line construction job

## REMARKS

Cutting of piano wire is prohibited.

Cutting capacity

Wire rope 6 x 7	: 22 mm
Wire rope 6 x 12	: 25 mm
Wire rope 6 x 19	: 25 mm
Soft steel bar	: 20 mm
Reinforcing rod	: 16 mm
Cu strands	: 41 mm
Al strands	: 41 mm
ACSR	: 38 mm
Guy wire 1 x 7	: 15 mm
Guy wire 1 x 19	: 20 mm
CCP cable	: N/A