
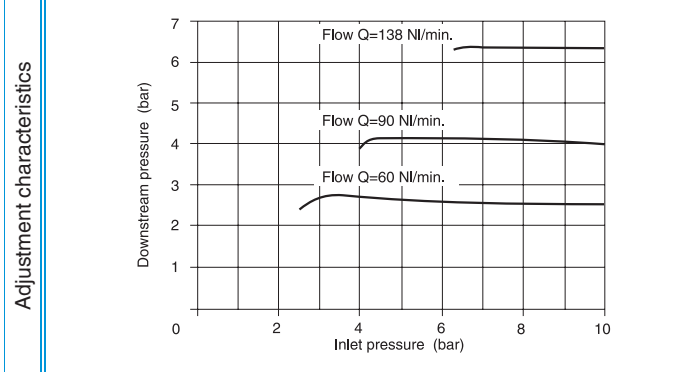


Ordering code	
<b>17304C.S.G.T</b>	
CONNECTIONS	
<b>C</b>	A = G 3/8"
	B = G 1/2"
Filter pore size	
<b>S</b>	A = 5
	B = 20
	C = 50
ADJUSTING RANGE	
<b>G</b>	A = 0 - 2 bar
	B = 0 - 4 bar
	C = 0 - 8 bar
	D = 0 - 12 bar
TYPE	
<b>T</b>	S = Automatic drain

Example: 17304A.B.C  
Filter - pressure regulator size 3 with G 3/8i connections, filter pore size 20 and adjusting range 0-8 bar.

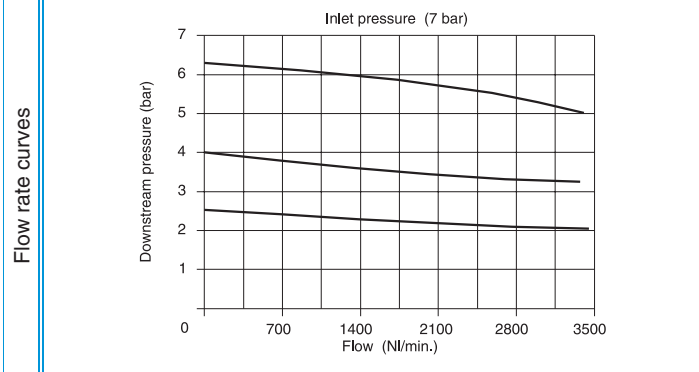

- Construction and working characteristics**
- Filter - diaphragm pressure regulator with relieving.
  - Balanced poppet.
  - Lockable handle by simply pressing it downwards in the desired position.
  - Body made with light alloy.
  - Wall mounting possibility with M6 screws protected by covers.
  - Double filtering action: by air centrifuging and by replaceable and reusable HDPE porous filter element.
  - Transparent technopolymer bowl with shock resistant technopolymer protection connected to the body with bayonet cap and safety button.
  - Manual and semi-automatic water drain valve; in the semiautomatic version the drainage happen when there is no pressure or by pushing the valve up-wards.
  - Possibility to see the water level on 360° also with bowl protection assembled.
  - Automatic water drainage bowl available on request.
  - Two pressure gauge connections with plug complete of seal.

**Technical characteristics**

Connections	G 3/8" - G 1/2"
Max. Inlet pressure	13 bar - 1,3 MPa
Max. ambient temperature (at 10 bar)	50°C
Pressure gauge connections	G 1/8"
Weight	gr. 645
Pressure range	0 - 2 bar / 0 - 4 bar 0 - 8 bar / 0 - 12 bar
Filter pore size	5 - 20 - 50
Bowl capacity	42 cm <sup>3</sup>
Assembly position	Vertical
Wall fixing screw	M6
Max. fitting torque	40 Nm

